

iQ Toro SC / iQ Granit SD

HIGH STATIC PERFORMANCES


The iQ Toro SC and iQ Granit SD are designed for **very sensitive environments** such as industrial and healthcare areas. They benefit from the **unique patented iQ next-generation surface treatment** for high durability and resistance.

MIX AND MATCH

These 28 references – 14 colours each- are designed to match and coordinate not only with one another, but to harmonize with selected references from the Tarkett iQ ranges: **iQ Optima** and **iQ Granit**. Every colour has a coordinated welding rod for a perfect finish.

iQ Toro SC

- Permanently **static conductive** flooring
- Electrical resistance of 5x10⁴ to 10⁶ Ohms

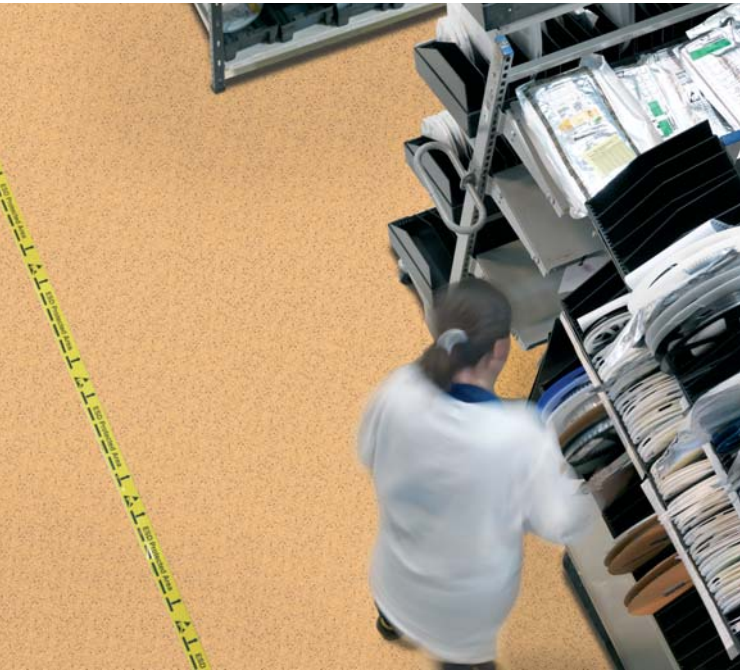

iQ Granit SD

- Permanently **static dissipative** flooring
- Electrical resistance of 10⁶ to 10⁸ Ohms



iQ NEW FOR LIFE™

iQ Toro SC & iQ Granit SD are part of the iQ range and therefore benefit from all the iQ properties.

- For lifelong savings - save 30% on maintenance and see payback within 3 years thanks to iQ's superior performance.
- For lifelong performance - keep your floor looking new with our unique dry-buffing restoration technology.
- A sustainable future - contribute positively to the environment and people's well-being thanks to our Cradle to Cradle® approach.

iQ Toro SC Static Conductive
iQ Granit SD Static Dissipative

TECHNICAL DATA	STANDARD	iQ TORO SC	iQ GRANIT SD
CLASSIFICATION			
Classification	EN ISO 10581	Permanently static conductive pressed homogeneous vinyl flooring	Permanently static dissipative pressed homogeneous vinyl flooring
	EN ISO 10874	Commercial: 34 / Industrial: 43	Commercial: 34 / Industrial: 43
Wear layer binder content	EN ISO 10581	Type I	Type I
TECHNICAL CHARACTERISTICS			
Total thickness	EN ISO 24346	2.0 mm	2.0 mm
Total weight	EN ISO 23997	2950 g/m²	2950 g/m²
Wear layer thickness	EN ISO 24340	2.0 mm	2.0 mm
Surface treatment		New iQ PUR	New iQ PUR
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 running metres x 200 cm Art. no. 3093 _ _ _ 3 digit colour number	Approx. 23 running metres x 200 cm Art. no. 3096 _ _ _ 3 digit colour number
	EN ISO 24342 Tiles (box)	61 x 61 cm - 14 tiles/box = 5.21 m² Art. no. 3094 _ _ _ 3 digit colour number	61 x 61 cm - 14 tiles/box = 5.21 m² Art. no. 3097 _ _ _ 3 digit colour number
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)			
Declaration of Performance	EN 14041	0019-0038-DoP-2013-07	0019-0033-DoP-2013-07
Reaction to fire	EN ISO 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥ 8 kW/m² Pass	Class Bfl-s1 ≥ 8 kW/m² Pass
Static electrical discharge	EN 1815	< 2.0 kV	< 2.0 kV
Thermal resistance	EN ISO 10456	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W
Slip resistance	EN 13893	μ ≥ 0.3	μ ≥ 0.3
TECHNICAL PERFORMANCES			
Dimensional stability	EN ISO 23999	≤ 0.40% for rolls / ≤ 0.25% for tiles	≤ 0.40% for rolls / ≤ 0.25% for tiles
Slip resistance	DIN 51130	R9	R9
Electrical insulation	VDE 0100, Part 600	Ri ≤ 5 x 10 ⁴ Ohms	Ri ≤ 5 x 10 ⁴ Ohms
Electrical resistance	ESD-approval SP-method 2472 EN 1081	R ≤ 10 ⁹ Ohms R1 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms R2 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms R 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms**	R ≤ 10 ⁹ Ohms R1 ≤ 10 ⁸ Ohms R2 ≤ 10 ⁸ Ohms R ≤ 10 ⁸ Ohms**
	EN/IEC 61340-4-1 / 100 V EN/IEC 61340-4-5	≤ 3.5x10 ⁴ Ohms	-
Clean room test	ASTM F24 F51	Class A	Class A
Castor chair	ISO 4918	Suitable	Suitable
Light fastness	EN ISO 105-B02	≥ level 7	≥ level 7
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Average measured value*: 0.02 mm	Required value: ≤ 0.10 mm Average measured value*: 0.02 mm
Chemical resistance	EN ISO 26987	Good resistance	Good resistance
Ease of decontamination	ISO 8690 – DIN 25415	Good	Good
Bacteria resistance	ISO 846 Part C	Does not favour growth	Does not favour growth
Underfloor heating		Suitable - max. 27°C	Suitable - max. 27°C
Seam strength	EN 684	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm
ENVIRONMENTAL PERFORMANCES			
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
COLOURS		14	14
The above information is subject to modification for the benefit of further improvement. (06/19). According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com . Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.			
100 % Recyclable Phthalate free Optimal indoor Air Quality TVOC AT 28 DAYS ≤ 10 µg/m³ Restart Ready SGS ISO 9001 SGS ISO 14001 iQ NEW FOR LIFE™			

iQ Toro SC	NCS N°	Welding Rod No.	iQ Toro SC	NCS N°	Welding Rod No.	iQ Granit SD	NCS N°	Welding Rod No.	iQ Granit SD	NCS N°	Welding Rod No.
100	S 1002-V50R	1287 322	570	S 1502-Y50R	1287 531	710	S 1500-N	1287 411	718	S 2020-R90B	1287 419
101	S 2502-B	1291 811	572	S 1515-Y30R	1287 438	711	S 2502-B	1287 412	719	S 1502-Y50R	1287 256
102	S 4502-B	1292 383	573	S 2030-Y30R	1287 059	712	S 4502-B	1287 413	721	S 2030-Y30R	1287 431
103	S 8502-B	1292 384	574	S 4005-Y50R	1287 379	713	S 7502-B	1287 414	722	S 4005-Y50R	1287 379
104	S 1005-Y40R	1288 255	575	S 7005-Y80R	1287 456	714	S 2005-Y40R	1287 415	723	S 7005-Y80R	1287 456
105	S 2020-Y30R	1292 372	576	S 4020-G50Y	1287 309	715	S 1020-Y30R	1287 416	724	S 4020-G50Y	1287 499
107	S 2020-R90B	1291 210	578	S 6502-B	1291 216	716	S 2020-Y30R	1287 417	726	S 6502-B	1287 394

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 • Belgium: Tarkett Belux Sprl – Tel. +32 16 35 98 80 • Denmark: Tarkett A/S – Tel. +45 43 90 60 11 • Finland: Tarkett Oy – Tel. +358 9 4257 9000 • France: Tarkett SAS – Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH – Tel. +49 62 33 810 • Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. – Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 • Netherlands: Tarkett BV – Tel. +31 416 685 491 • Norway: Tarkett AS – Tel. +47 32 20 92 00 • Portugal: Tarkett SA – Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. – Tel. +34 91 358 00 35 • Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH – Tel. +41 043 233 79 24 • Turkey: Tarkett Aspen – Tel. +90 212 213 65 89 • United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 354 040 ■ EASTERN EUROPE: Baltic Countries: Tarkett Baltics, Tel. +370 21 252 220 • Czech Republic: Tarkett org. srožka – Tel. +420 271 001 600 • Hungary: Tarkett Polska SP. Z o.o. magyarországi fióktelepe – Tel. +36 1 437 8150 • Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3737 • Slovakia: Tarkett Polska, organizačná zložka – Tel. +421 2 48291 317 • South East Europe: Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1555 ■ AFRICA: Tarkett International, Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East, Tel. +951 1 51 3363/4 • Israel: Tarkett International, Tel. +93 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 • Canada: Tarkett Inc. – Tel. +1 450 293 1793 ■ LATIN AMERICA: Brazil: Tarkett – Tel. 55 12 3954 7108 • Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 • Mexico /Central America: Tarkett Latam Mexico - Tel. +55 11 98410 9310

www.professionals.tarkett.com



Printed on 100% recycled paper and cardboard - 100% recyclable

Customs Tariff: 482050000

iQ Toro SC / iQ Granit SD - 3096 0202 05 - 06-19





iQ Toro SC
iQ Granit SD



HOMOGENEOUS
COMPACT VINYL



iQ Toro SC / iQ Granit SD

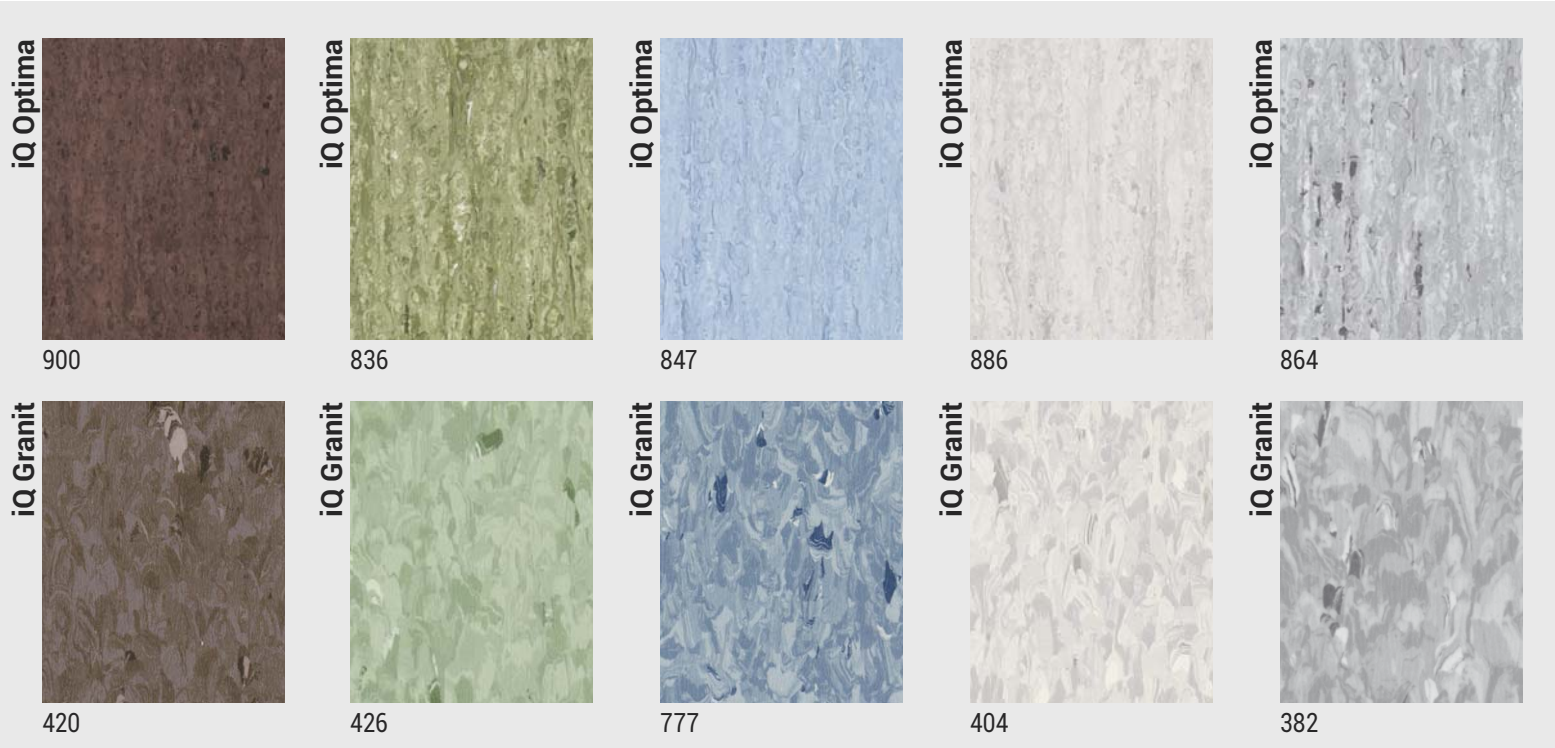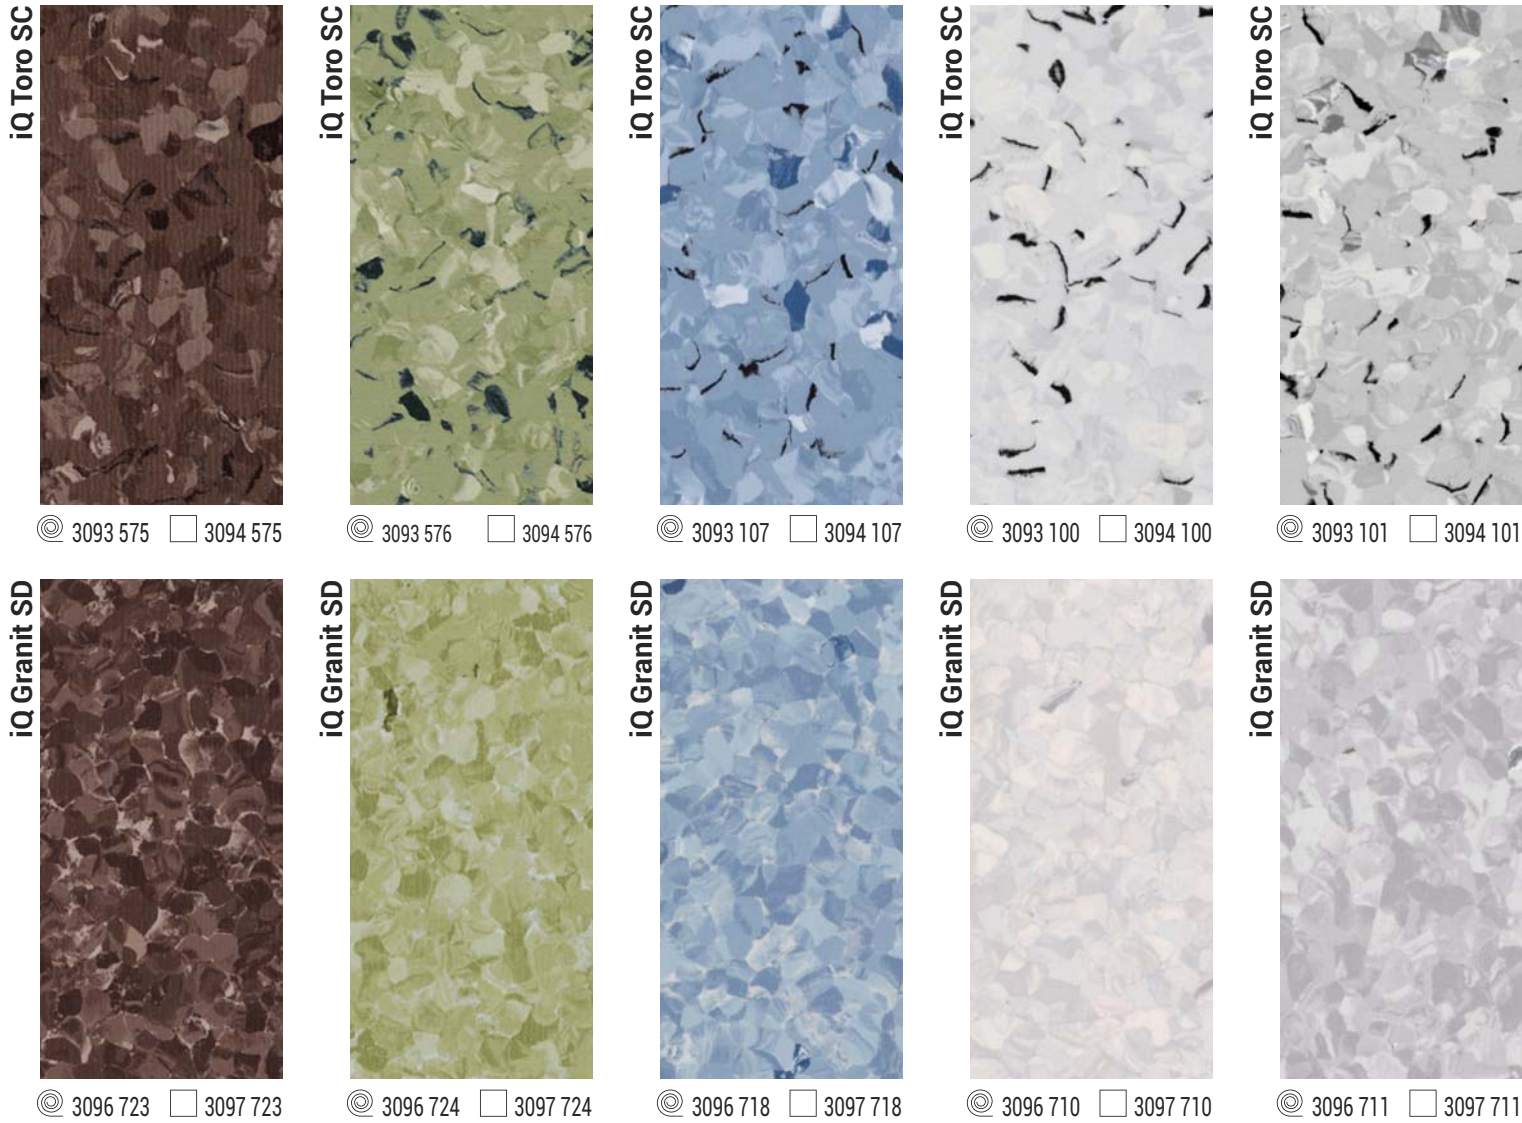

The flooring colours and designs on our iQ Toro SC and iQ Granit SD sample cards are for illustration purpose only. They are not contractual images - which may differ from the actual floors - and do not stand for product recommendation. As a consequence, users agree that they alone are responsible for the use they make of this information. Please visit Tarkett's website (www.professionals.tarkett.com) or contact your Tarkett sales representative for all information on our product use and installation.

iQ Toro SC and iQ Granit SD are colour matched to coordinate with iQ Optima and iQ Granit ranges.

